
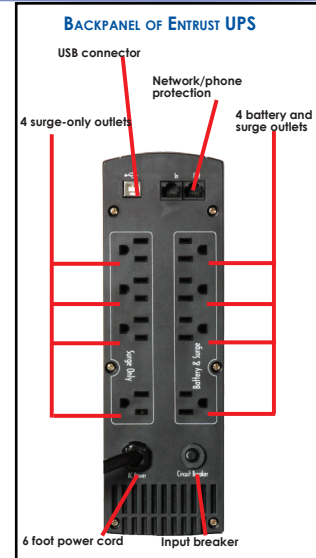


ETR500 - 500VA/300W • ETR700 - 700VA/420W  
 ETR1000 - 1000VA/600W • ETR1500 - 1500VA/900W



The Minuteman Entrust Series UPS is an exciting new UPS line that provides users all the features, usually available in higher-priced UPS products, to protect your valuable equipment, offering voltage regulation, spike and surge protection and battery backup.

Each unit has four outlets that provide backup battery support along with spike and surge protection. There are an additional four spike and surge protected outlets for accessory devices that don't require battery support. In addition, two of the outlets are specifically spaced to support equipment with transformer blocks.

The small, uniquely designed, footprint of the Entrust UPS is ideal for placement on or under a desk. All models in the Series can also be installed vertically on a shelf in a rack or cabinet installation.

Additionally, Entrust UPS products come with all the award-winning service and support capabilities offered by Para Systems, Inc., including a three-year limited warranty, (two-years on the battery), and a \$75,000 Platinum Protection Plan (USA and Canada only).

### Entrust Features

- **USB Communications** – The Entrust Series has HID-compliant USB communication that is automatically recognized by all Windows® software versions and require no special drivers.
- **Buck/Boost Voltage Regulation** – Provides a stable AC source during less than optimal power conditions without constant use of internal batteries.
- **Slim-line Profile** – Provides users with the ability to install the Entrust UPS in a variety of settings (rack shelf, floor, desktop, etc.).
- **RoHSCompliant**–Compliant with European Economic Unions directive on the reduction of hazardous substances (RoHS) in electronic equipment.
- **SentryPlus™ Software** – SentryPlus auto-shutdown and monitoring software is included with every unit. No special downloads or coupons are required.
- **Larger Load Capacities** – Para Systems has increased the capacities of all models in the Entrust UPS line, allowing the units to support larger power requirements.

### Applications

- Desktop/laptop workstations
- Small business phone systems
- VoIP handsets
- Network devices

# Minuteman® Entrust Series Line Interactive UPS Specifications

Specifications	ETR500	ETR700	ETR1000	ETR1500
Maximum load (VA/Watts)	500VA/300W	700VA/420W	1000VA/600W	1500VA/900W
Battery rating	(1) 12V/5AH	(1) 12V/7AH	BM0040	BM0041
Unit weight (lbs.)	13.23 lb (6.0kg)	15.44 lb (7.0kg)	28.89 lb(13.1kg)	29.33 lb (13.3kg)
Input capacity	8 Amps	10 Amps	12 Amps	
Unit dimensions (H x W x D)	10.8 x 3.43 x 10.9 in (274.4 x 87 x 277.2 mm)		10.8 x 3.43 x 16.4 in (274.4 x 87 x 412.5 mm)	
<b>GENERAL SPECIFICATIONS</b>				
Topology	Single boost/buck line interactive, simulated sine wave			
Warranty	(USA and Canada only) 3-year limited warranty, Platinum Protection Plan / 2-year warranty on battery			
<b>AC INPUT</b>				
Number of phases	Single (2W + G)			
Input voltage (Acceptable input voltage)	120VAC (0 - 160VAC)			
Input voltage range (Normal mode)	90 - 150VAC			
DC start capability	Yes, (defaults to 60Hz)			
Power cord	NEMA 5-15P on a 6-ft. power cord			
Surge energy rating	320 Joules			
Let through	5%, 6kV ring wave ANSI C62.41-1991 Cat 3			
Response time	0 ns normal mode, < 5 ns common mode			
AC leakage current	<1 mA			
<b>AC OUTPUT (NORMAL MODE)</b>				
Load power factor	0.6			
Output frequency	Same as Input			
Short circuit protection	Re-settable circuit breaker and electronically limited			
Overload capability	110% - 5 minutes ≥120% - immediate shutdown			
Output voltage regulation	120VAC: -12.5% to +8.4%			
Waveform	Same as Input			
Boost mode voltage(Buck mode voltage)	Nominal +16% (Nominal -14%)			
Line mode voltage range	105 - 130VAC			
Efficiency	Normal mode > 90%			
<b>AC OUTPUT (BATTERY MODE)</b>				
Output voltage	Nominal 120VAC			
Waveform	Stepped sine wave (simulated sine wave)			
Battery mode voltage regulation	Nominal ± 6% until LBW			
Transfer time	6-10 ms			
Output frequency & regulation	50/60Hz ± 0.5Hz (Unless synchronized to utility)			
Battery runtime (full load/half load)	≥ 2 minutes / ≥ 9 minutes			
Short circuit protection	Active electronic (current limit)			
<b>BATTERIES</b>				
Replacement	Hot swappable			
Recharge time	8 hours to 90% after full load discharge			
<b>ENVIRONMENTAL</b>				
Operating temperature	32°F to 104°F (up to 5,000 ft above sea level (0°C to +40°C (up to 1,500 meters above sea level)			
Operating elevation	32°F to 95°F (5,001-10,000 ft above sea level (0°C to +35°C (1,501 to 3,000 meters above sea level))			
Storage temperature/ Relative humidity	5°F to 113°F (-15°C to +45°C) / 0 - 95% non-condensing			
<b>MECHANICAL</b>				
Line protection (data/phone)	Single line input/output (RJ-45/RJ-11)			
Outlets	4 - surge only outlets 4 - battery & surge with (2) transformer blocks			
Monitoring software	Includes SentryPlus software			
Communications	USB			
Safety and environment	UL1778, cUL (CSA 22.1), CE, FCC Class B RoHS			



Distribuido regionalmente por:

ESPACIO RESERVADO PARA  
ETIQUETA DEL DISTRIBUIDOR  
(AVERY 8160)



Tels.: (55)57402142 / (55)57400244  
Email: ventas@telsa.com.mx  
Web: www.telsa.com.mx

Innovación y soporte técnico desde 1985